



ZQ 900-11

- 3 cable entries M 20 x 1.5
- Metal enclosure
- one-side operation / wire up to 75 m long
- Release push button
- Position indicator
- Robust design
- Large wiring compartment
- Twisting of towing eye not possible
- External watertight collar
- wire pull and breakage detection

Data

Ordering code

Product type description	ZQ 900-11
Article number (order number)	101184327
EAN (European Article Number)	4030661332741
eCl@ss number, version 12.0	27-37-12-01
eCl@ss number, version 11.0	27-37-12-01
eCl@ss number, version 9.0	27-37-12-01
ETIM number, version 7.0	EC002033
ETIM number, version 6.0	EC002033

Approvals - Standards

Certificates	cULus
	CCC

General data

Standards	EN ISO 13850
	EN IEC 60947-5-5
	EN IEC 60947-5-1
Housing material	Metal, zinc die-cast
Housing coating material	painted

General data

Material of the housing cover	Glass-fibre, thermoplastic
Length of the wire, maximum	75 m
Gross weight	1,300 g

General data - Features

Indicator lamp	No
Number of auxiliary contacts	1
Number of safety contacts	1

Safety classification

Standards	EN ISO 13849-1
Mission time	20 Year(s)

Safety classification - Safety outputs

B10D Normally-closed contact (NC)	100,000 Operations
-----------------------------------	--------------------

Mechanical data

Mechanical lifetime, minimum	1,000,000 Operations
------------------------------	----------------------

Mechanical data - Connection technique

Termination	Screw terminals M20 x 1.5
Cable section, minimum	0.75 mm ²
Cable section, maximum	2.5 mm ²
Note	All indications including the conductor ferrules.

Mechanical data - Dimensions

Length of sensor	69.7 mm
Width of sensor	71.5 mm
Height of the Sensor, minimum	220.3 mm
Height of the Sensor, maximum	236.3 mm

Ambient conditions

IP Degree of protection	IP67
	IP65
Ambient temperature	-25 ... +70 °C

Ambient conditions

Relative humidity, maximum	95 %
----------------------------	------

Ambient conditions - Insulation values

Rated insulation voltage U_i	500 V
Rated impulse withstand voltage U_{imp}	6 kV

Electrical data

Thermal test current	6 A
Utilisation category AC-15	230 VAC
Utilisation category AC-15	4 A
Utilisation category DC-13	24 VDC
Utilisation category DC-13	1 A
Switching element	1 NO contact, 1 NC contacts
Switching principle	Snap action
Material of the contacts, electrical	Silver

Note

Note (General)	For lengths of over 10 m, intermediate wire supports must be installed every 3 to 5 m.
	The screwed G24-M20 indicator lamp must be ordered separately, see accessories.
	Recommended cable lengths for pull-wire Emergency-Stop switches in relation to the range of ambient temperature.
	As the thimbles are subject to deformation in case of wire pull, the wire should be pulled several times after fitting. After that, the wire must be re-tensioned using the eyebolt or the tensioner.
	At 2 m ... 5 m distance intermediate wire supports are required, see accessories

Pictures

Product picture (catalogue individual photo)




ID: kzq90f07

[| 557.24 KB | .jpg | 1000 x 1499 Pixel](#)

[| 40.9 KB | .jpg | 233 x 350 Pixel](#)


[| 71.41 KB | .png | 209 x 314 Pixel](#)

Dimensional drawing basic component




ID: 1zq-9g02
| 133.94 KB | .jpg | 1000 x 701 Pixel
| 11.72 KB | .png | 210 x 147 Pixel

Diagram



ID: ktf--k01
| 54.52 KB | .jpg | 1000 x 554 Pixel
| 2.76 KB | .png | 210 x 116 Pixel

Characteristic curve




ID: kzq90d02
| 154.75 KB | .jpg | 1000 x 729 Pixel
| 8.89 KB | .png | 210 x 153 Pixel

Operating principle




ID: kzq90a11
| 48.48 KB | .jpg | 1000 x 252 Pixel
| 4.05 KB | .png | 210 x 53 Pixel

Operating principle



ID: kzq90a13
| 72.77 KB | .jpg | 1000 x 370 Pixel
| 1.58 KB | .png | 210 x 78 Pixel

Operating principle

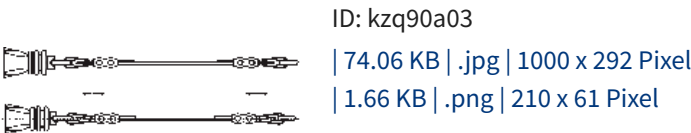

The details and data referred to have been carefully checked. Images may diverge from original. Further technical data can be found in the manual. Technical amendments and errors possible.

Generated on: 13/08/2026, 16:51